

OntheGo™ 45W Charger with 60W Max

SKU: ST-COTG45S-US / ST-COTG45B-US / ST-COTG45Y-US / ST-COTG45P-US

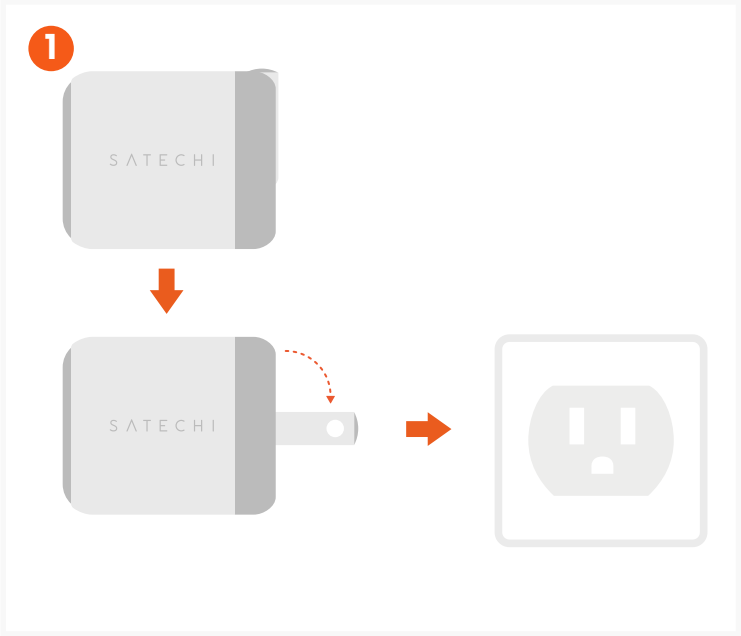

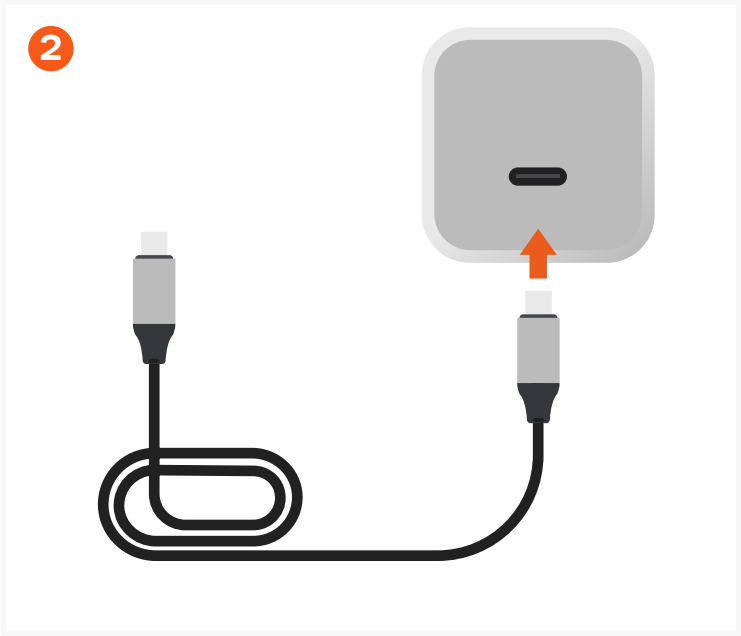


Plug Into a Wall Outlet

- Unfold the prongs fully.
- Plug the wall charger into a Type A (US) power outlet.

Insert a USB-C Cable

- Insert a USB-C cable into the charger's USB-C port. *USB-C cable not included.*
- For full-speed charging, use a certified USB-C cable that supports USB Power Delivery (PD).

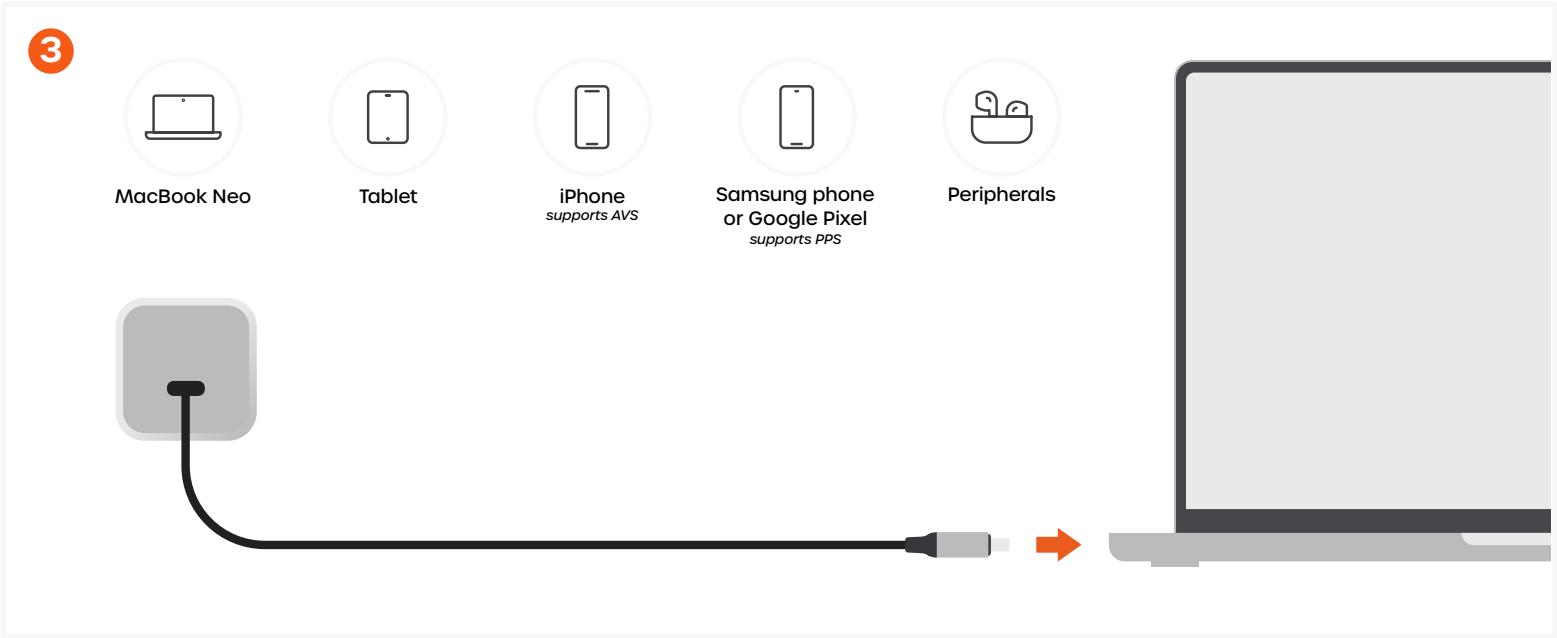

Connect and Charge (Up to 60W Max)

- Connect the cable to your USB-C compatible device or peripheral to charge.
- Charges phones, tablets, earbuds, smartwatches, and MacBook Neo.
- Optimized for fast charging on the latest iPhones (AVS) and on Samsung and Google Pixel phones (PPS).
- Delivers up to 60W, then shifts to a sustained 45W based on internal temperature or duration of use. Full-speed charging resumes once the charger cools.

Specifications

Foldable Type A (US) Prongs
Fold flat for travel.
Unfold fully before plugging in

Input
100-240V ~ 50/60Hz
1.5A Max

Technology
GaN

Output:
5V ⎓ 3A (15W)
9V ⎓ 3A (27W)
12V ⎓ 3A (36W)
15V ⎓ 3A (45W)
20V ⎓ 3A Max (60W Max)
AVS: 9-15V ⎓ 3A / 15-20V ⎓ 2.25A
DPS: 15-20V ⎓ 3A
PPS: 5-21V ⎓ 3A (60W Max)

Rated Output:
45W (60W Max)



Available Colors:

Citrus	Blush	Indigo	Silver
ST-COTG45Y-US	ST-COTG45P-US	ST-COTG45B-US	ST-COTG45S-US

USB-C Port

Dimensions:
34.5 × 41 × 36 mm
1.36 × 1.61 × 1.42 in

Weight:
67 g (2.4 oz)

Important Notes

- Keep away from water or other liquids.
- If the product is damaged, stop using it immediately and contact Satechi support.
- Charging speed depends on your device. The charger supplies only the power your device requests.
- Devices that need more than 60W, such as MacBook Pro 14-inch and 16-inch, may charge slowly or not hold a charge under heavy use.

CERTIFICATIONS & SAFETY

FCC Class B

CE Certified

ICES(B)/NMB(B)

Intertek

Intertek

WEEE

If the product is damaged, stop using the product immediately and contact the manufacturer for support.
Ambient temperature and altitude of the product: Temperature 25°, altitude 2 km.