




SLIM DOCK FOR IMAC 24"

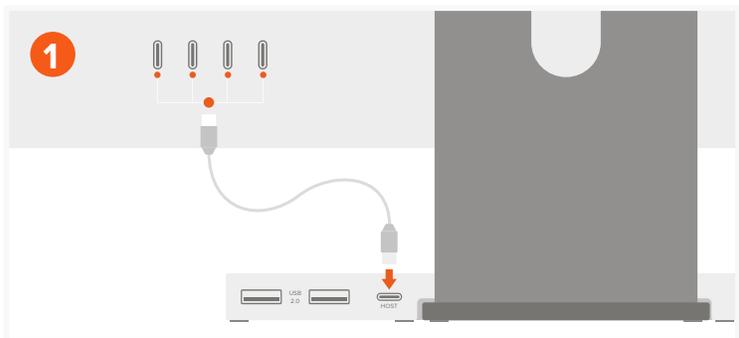


1 Connect the Hub to one of your iMac's Thunderbolt ports by connecting to the "HOST" port on the dock, using the included USB-C cable.

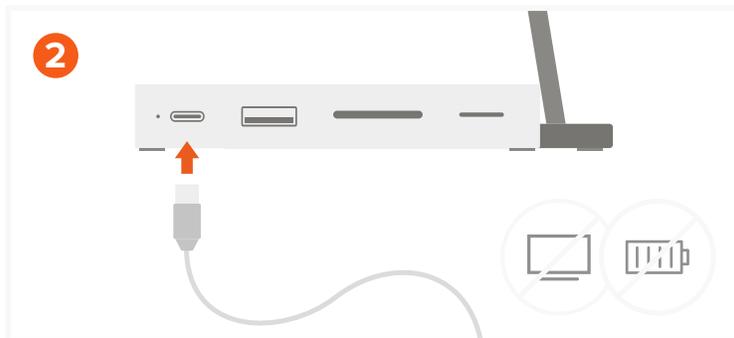


2 Connect a USB-C drive or peripheral to the USB-C data port (up to 10 Gbps). Does not support charging or video.

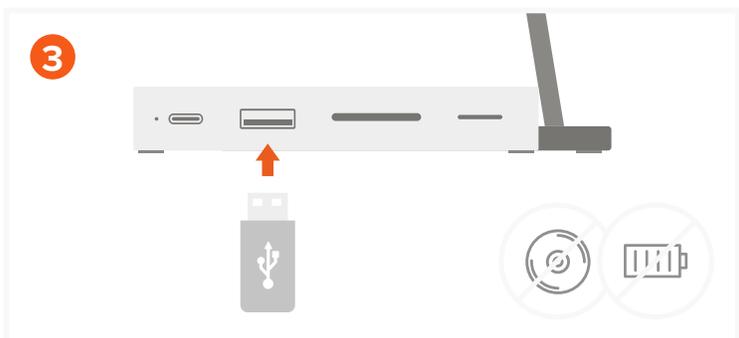


3 Use the USB-A data port to connect USB devices up to 10 Gbps. Does not support charging or CD readers, including Apple USB SuperDrive.

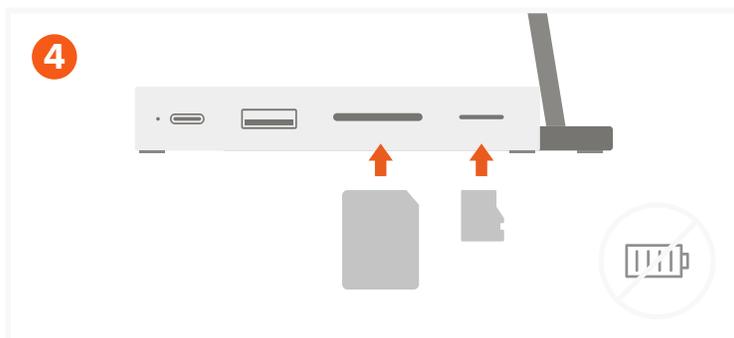


4 Insert micro or SD cards into card reader slots. Supports UHS-I speeds.

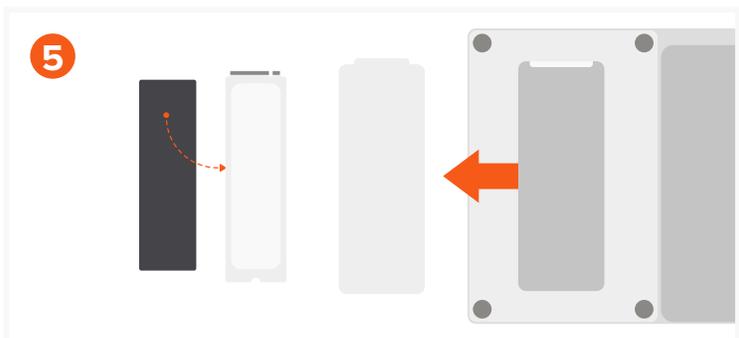


5 To install the SSD, lift the backside cover on the adapter. Apply the Thermal Pad included to the bottom of the SSD. Ensure pad is properly aligned.

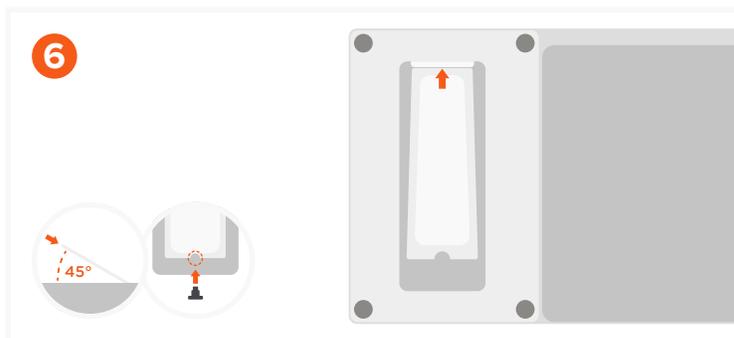

6 Insert the SSD (*not included*) faceup at a 45-degree angle. Once installed, push down on the SSD and use the silicone pin to keep it in place. Supports NVMe & SATA (up to 10Gbps max speed, 2TB max capacity)

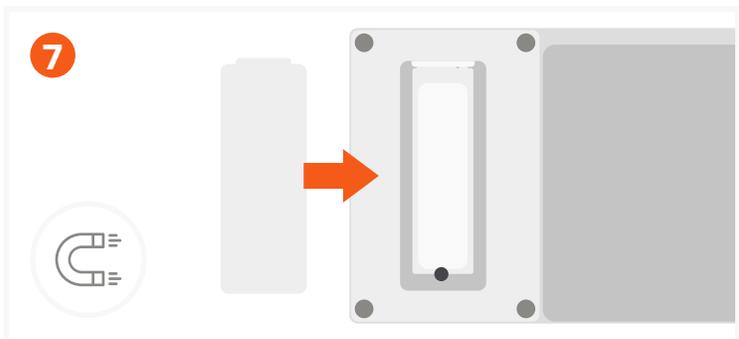

7 Once the SSD is secured, magnetize the cover back onto the hub.

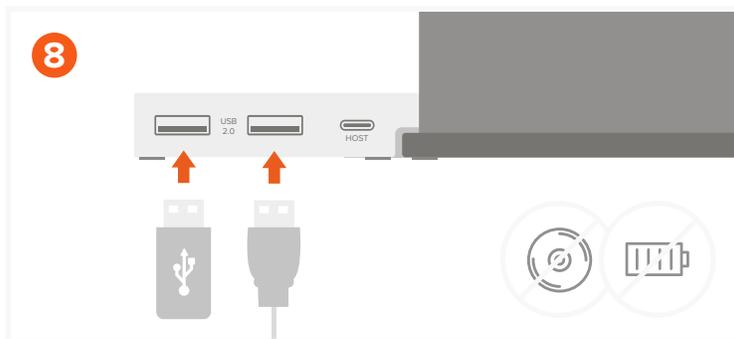

8 Use 2 USB 2.0 data ports (480Mbps) on the back of the hub to connect USB devices. Does not support charging or CD readers, including Apple USB SuperDrive.