


QUICK GUIDE

MOBILE XR HUB WITH MICROSD



Connect the adapter to a compatible host device. The LED indicator will turn on once connected.

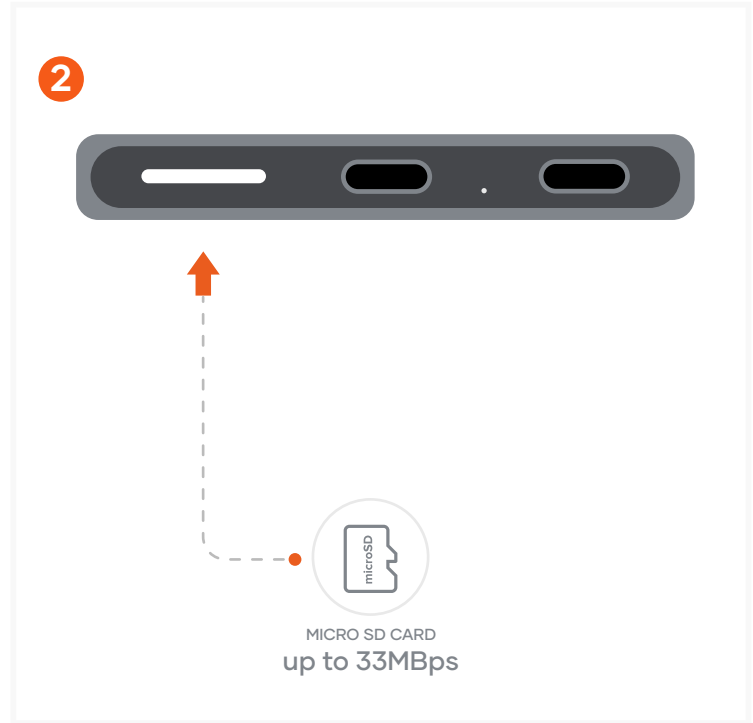

Insert a UHS-I microSD card into the card reader slot. Supports UHS-I SDXC microSD cards.



Connect a Thunderbolt 4, USB4, or USB-C to HDMI/DP cable to the USB-C port. Supports USB 3.0 at 10 Gbps, 2-lane DP1.4 with 8.1 Gbps per lane, 4-lane DP1.2 for iPhone 15, 4K@60Hz mode depending on the host and screen.



Connect a USB-C charging cable to either USB-C PD port. Supports USB 2.0, plug & play; PD3.1 SPR, with a maximum input up to 100W depending on the host device.

Note: This product may not be compatible with all cases. Maximum supported case thickness is 2.5mm. For cases that exceed this thickness, compatibility cannot be guaranteed.